DURITE[®]

auto electrical parts

Technical Information Sheet


Part No. 0-005-59

Heavy Duty Dual Bus Bar with connecting link, 100 amp, Nickle Plated Brass Bar with 4 stainless steel M6 (1/4") Studs and 12 M4 (5/32") screws.

Nylon Glass Fibre Reinforced insulating base/cover. Rated at 100 amp at 48 volt dc. 6 Removable windows in cover for cable entry. 4 x 5mm recessed mounting holes.



Technical Drawing (not to scale)

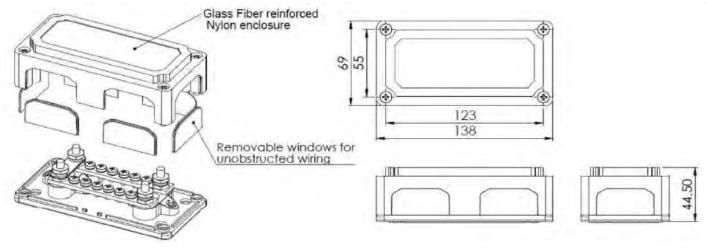

Specification

Type DC Rating @ 48vdc Bolts Bar Material Base Fixing Weight Dimensions Bus Bar 100A (Max Continuos) 4 x M6 (1/4") & 12 x M4 (5/32") Screws Nickle Plated Brass Reinforced Nylon Glass Fibre 4 x 5mm recessed fixing holes 460g See above

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.







Tel: +44 (0)1255 555200 Fax: +44 (0)1255 555222 E-mail: sales@durite.co.uk Web: www.durite.co.uk