

# auto electrical parts

## Technical Information Sheet

**Part No. 0-234-60**




10 Way Fusebox with LED Indication

Durite's 10 Way Fusebox with LED Indication This fusebox will indicate a blown fuse by illumination of a LED to save time looking for the blown fuse. Also this unit is Ingress Protected from weather conditions and dust.




32VDC, 25A Max Load Per Circuit. IPX5.



### Technical Drawing (not to scale)

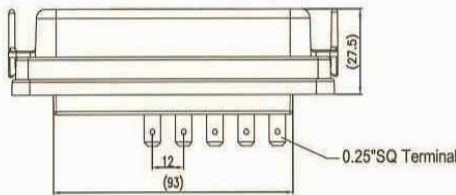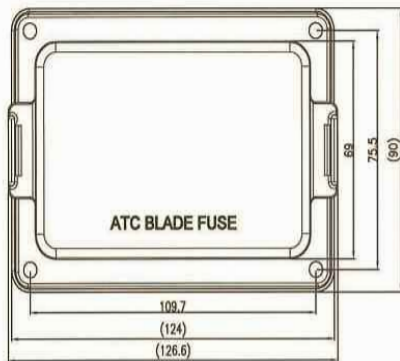

Voltage (Max.)	32 VDC.	Mounting Holes	ATC Blade Fuse Isometric View
Output Terminal Rating	25A max. load per circuit.		
Terminal Wire Size	#10-16 AWG.		
Fuse Specifications	For ATC Blade Fuses Used Only		
Mounting Torque Rating	8 in-lb (0.9Nm) max.	Terminal Dim.	Blade Fuse Dim.
Environmental Rating	IP X5		
Temperature Rating	-25 °C to +85 °C		



Material :  
 △ Cover : PC. (Black)  
 Housing & Base : PBT. (Black)  
 Terminal : Copper

NOTE:  
 Tolerance ±0.5 except noticed

### Specification

Voltage	32VDC
Amps	150A Max
Terminal Wire Size	10-16AWG
Fuse Specifications	ATC Blade Fuses Only
Mounting Torque Rating	8 lb (0.9Nm) max
Operation Temperature	-25 to 85C
IP Rating	IPX5
Material:	Cover: Polycarbonate. Housing/Base: PBT Black. Terminals: Copper
Colour	Black
Certificate	n/a
Dimensions	Please see above (dimensions in mm)

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.