

auto electrical parts

Technical Information Sheet

Part No. 0-380-06 to 0-380-30


Circuit breaker, for 12/24 volt dc systems. Thermal bi-metallic with manual re-set. Will replace standard blade fuses in many fuseholders and boxes.

Part Number	rated at	colour
0-380-06	6 amp	green
0-380-08	8 amp	tan
0-380-10	10 amp	red
0-380-15	15 amp	blue
0-380-20	20 amp	yellow
0-380-25	25 amp	white
0-380-30	30 amp	light green



The rated value is at 23°C and should be derated as temperature changes to avoid nuisance tripping.


Technical Drawing (not to scale)

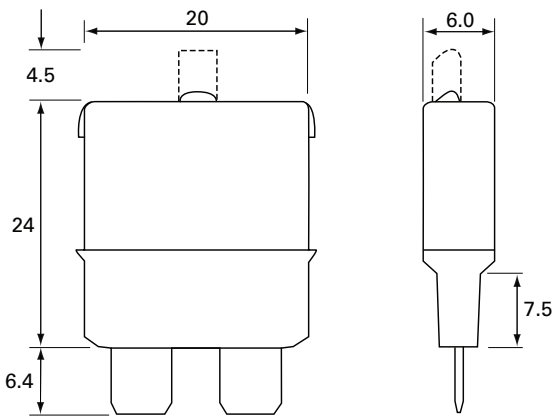

Time/Current Graph

Graph derating factor

-40°C	0.73
-30°C	0.78
-20°C	0.82
-10°C	0.86
0°C	0.91
10°C	0.95
23°C	1
40°C	1.09
50°C	1.16
60°C	1.25
70°C	1.33
85°C	1.43

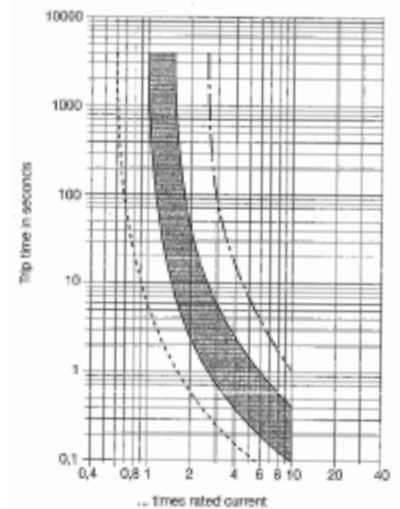

Specification

Type	Circuit breaker
Voltage	12/24 volt dc (max 32 volt dc)
Voltage drop	< 150mV
Current ratings	6 - 30 amp
Short circuit breaking capacity	300 operations at ≤ 50 amp ≥3 operations at 150 amp ≥1 operation at 2000 amp
Degree of protection (IP)	Operating area IP30, terminal area IP00
Vibration	10g (57-500 Hz)
Shock	50g (11ms)
Operating temperature	-40°C to +85°C
Humidity	95% RH
Weight	5g
Dimensions	l 20 x w 6 x h 38 (inc blades and trip extended)

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.

Gordon Equipments Limited

Durite Works
Valley Road
Dovercourt
Essex CO12 4RX
England



Tel: +44 (0)1255 555200
Fax: +44 (0)1255 555222
E-mail: sales@durite.co.uk
Web: www.durite.co.uk

Registered in England at address shown No. 373113
The words 'Gordon', 'Durite', 'Nolten' and 'Acfil' are registered trade marks