

auto electrical parts

Technical Information Sheet

Part No. 0-442-40

High intensity Amber LED vertical mounting warning light with chrome bezel. Dual voltage 4 LED unit with 19 programmable flash sequences, can be synchronized with other units, two bolt fixing. CE and ECE approved.


Additional information

Red wire +ve supply
Black wire -ve ground
White wire alternating flash
Yellow wire synchronization and flash pattern

Momentarily connecting the yellow wire to red changes the flash pattern, sequencing it through the 19 patterns, connecting it 3 times in quick succession resets the flash pattern to default (sequencing). Connecting the yellow wires together synchronizes the lights provided they have been set to the same flash pattern. Connecting one white wire to red will alternate the flash pattern of a pair of lights.



Technical Drawing (not to scale)

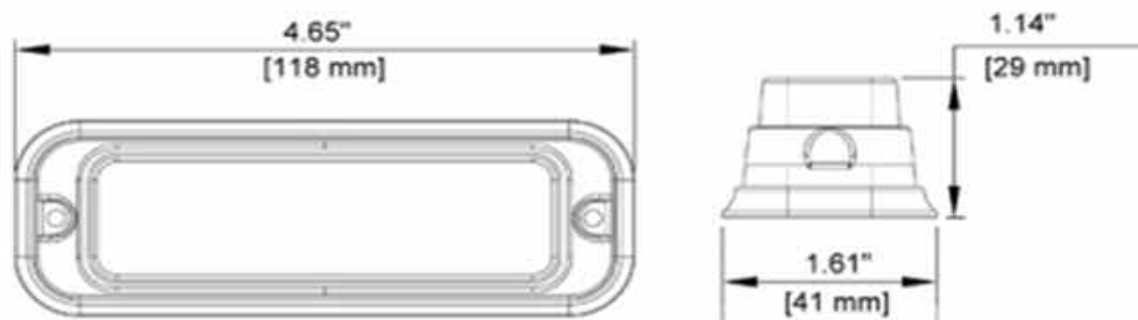

Specification

Type High intensity LED stobe
Colour Amber
Number of LEDs 4 x 1 watt
Voltage 12/24 volt dc
Current 0.70 amps
Flash patterns 19
Base Metal Alloy
Bezel Chromed plastic
Operating temperature -30°C to +60°C
Protection IP68
Compliance CE, ECE

No.	Flash Pattern	No.	Flash Pattern
0	Random (default)	10	Double (all)
1	Single (split)	11	Quad (all)
2	Double (split)	12	Quint (all)
3	Quad (split)	13	Mega (all)
4	Quint (split)	14	Ultra (all)
5	Mega (split)	15	Single-Quad (all)
6	Ultra (split)	16	Single H/L (all)
7	Single-Quad (split)	17	Steady 2 (California)
8	Single H/L (split)	18	Steady 4 (all)
9	Single (all)		

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.

Gordon Equipments Limited

Durite Works
Valley Road
Dovercourt
Essex CO12 4RX
England



Tel: +44 (0)1255 555200
Fax: +44 (0)1255 555222
E-mail: sales@durite.co.uk
Web: www.durite.co.uk

Registered in England at address shown No. 373113
The words 'Gordon', 'Durite', 'Nolten' and 'Acfil' are registered trade marks