

auto electrical parts

Technical Information Sheet

Part No. 0-446-75


Mini xenon beacon, 12 -110 volt dc with polycarbonate amber lens and 2 bolt fixing, 70 flashes per minute. I 97 x w 72 x h 132mm. CE and e approved.

Additional Information

The beacon is supplied with flying leads (350mm), 2 fixing bolts (5 x 5mm), nuts and washers, pre-insulated crimp terminals (0.5 - 1.0mm² conductors) and a foam base gasket.



Technical Drawing (not to scale)

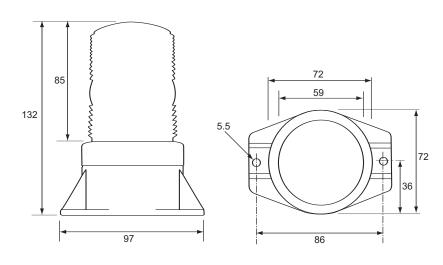

Specification

Type Voltage rating Current Flash rate Energy level Lens material Flying leads Weight Dimensions Approvals Protection Mini xenon beacon 12 - 110 volt dc 0.22 amp @ 12 volt dc 70 single flash per minute 1.7 Joules Polycarbonate 350mm 300g I 97 x w 72 x h 132mm (including level and tabs) CE and 'e' Waterproof against spray

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.

Gordon Equipments Limited Durite Works Valley Road Dovercourt Essex CO12 4RX England



Tel: +44 (0)1255 555200 Fax: +44 (0)1255 555222 E-mail: sales@durite.co.uk Web: www.durite.co.uk