

auto electrical parts


Technical Information Sheet

Part No. 0-605-60

Durite's Single Pole Single Throw On/Off Isolator with removable handle. Used for isolating vehicle battery's. 24VDC Max. 250A Continuous. 2500A Max for 3 Seconds. M10 Terminals. Silver Plated Copper Contacts. Connections not polarized. Protected to IP65.



Technical Drawing (not to scale)

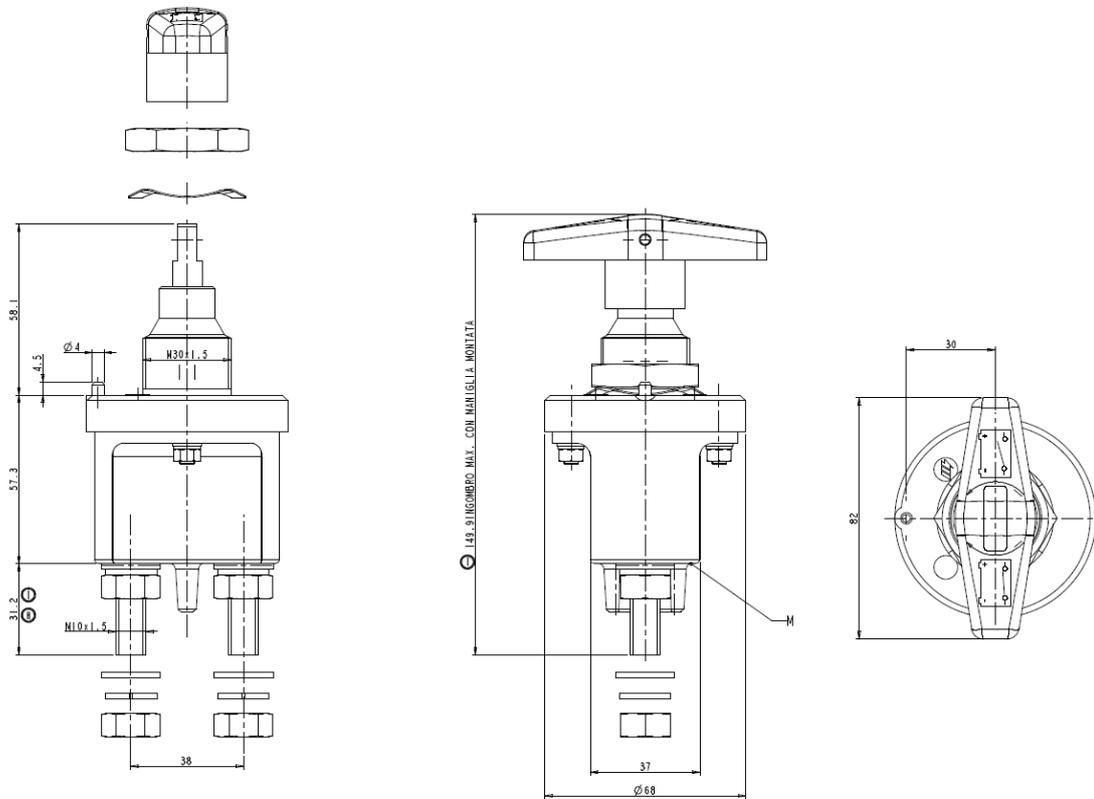

Specification

Volts	24 VDC Max
Amps	250A Continuous. 2500A Max for 3 Seconds
Type	D1 Normally Open
Studs	2 x M10
Stud Tightening Torque	20Nm
Contacts	Silver Plated Copper
Connections	Not Polarized
Protection	IP65
Weight	0.6Kg
Operating Temperature	-40C - +80C
Certificate	n/a
Dimensions	Please see above (dimensions in mm)

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.