

auto electrical parts

Technical Information Sheet

Part No. 0-977-XX


Single insulated flexible starter/battery cable.

Additional Information

0-977-01 black
0-977-05 red



Technical Drawing (not to scale)

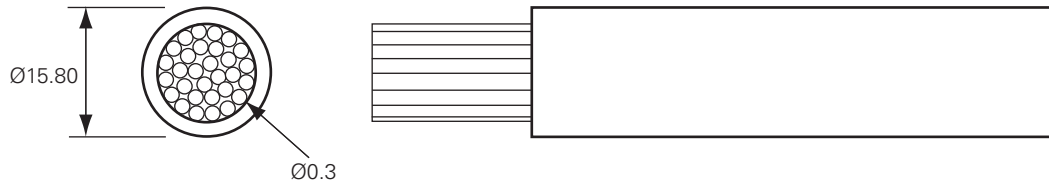

Specification

Type	Single insulated starter/battery cable for use in tough conditions
Wire	905/0.30mm copper
Cross section	70.0mm ²
Current rating	485 amp
Voltage	600 volt dc maximum
Resistance	300.0mΩ/m @ 20°C
Insulation	Soft semi filled general purpose extrusion grade PVC insulation compound
Overall diameter	15.8mm
Temperature	-30° to 70°C
Length of Cable	10 Metres

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.